




Commercial Half Rack

LIFETIME WARRANTY

PARTS CHECK

All nuts and bolts use a 24mm socket or wrench.

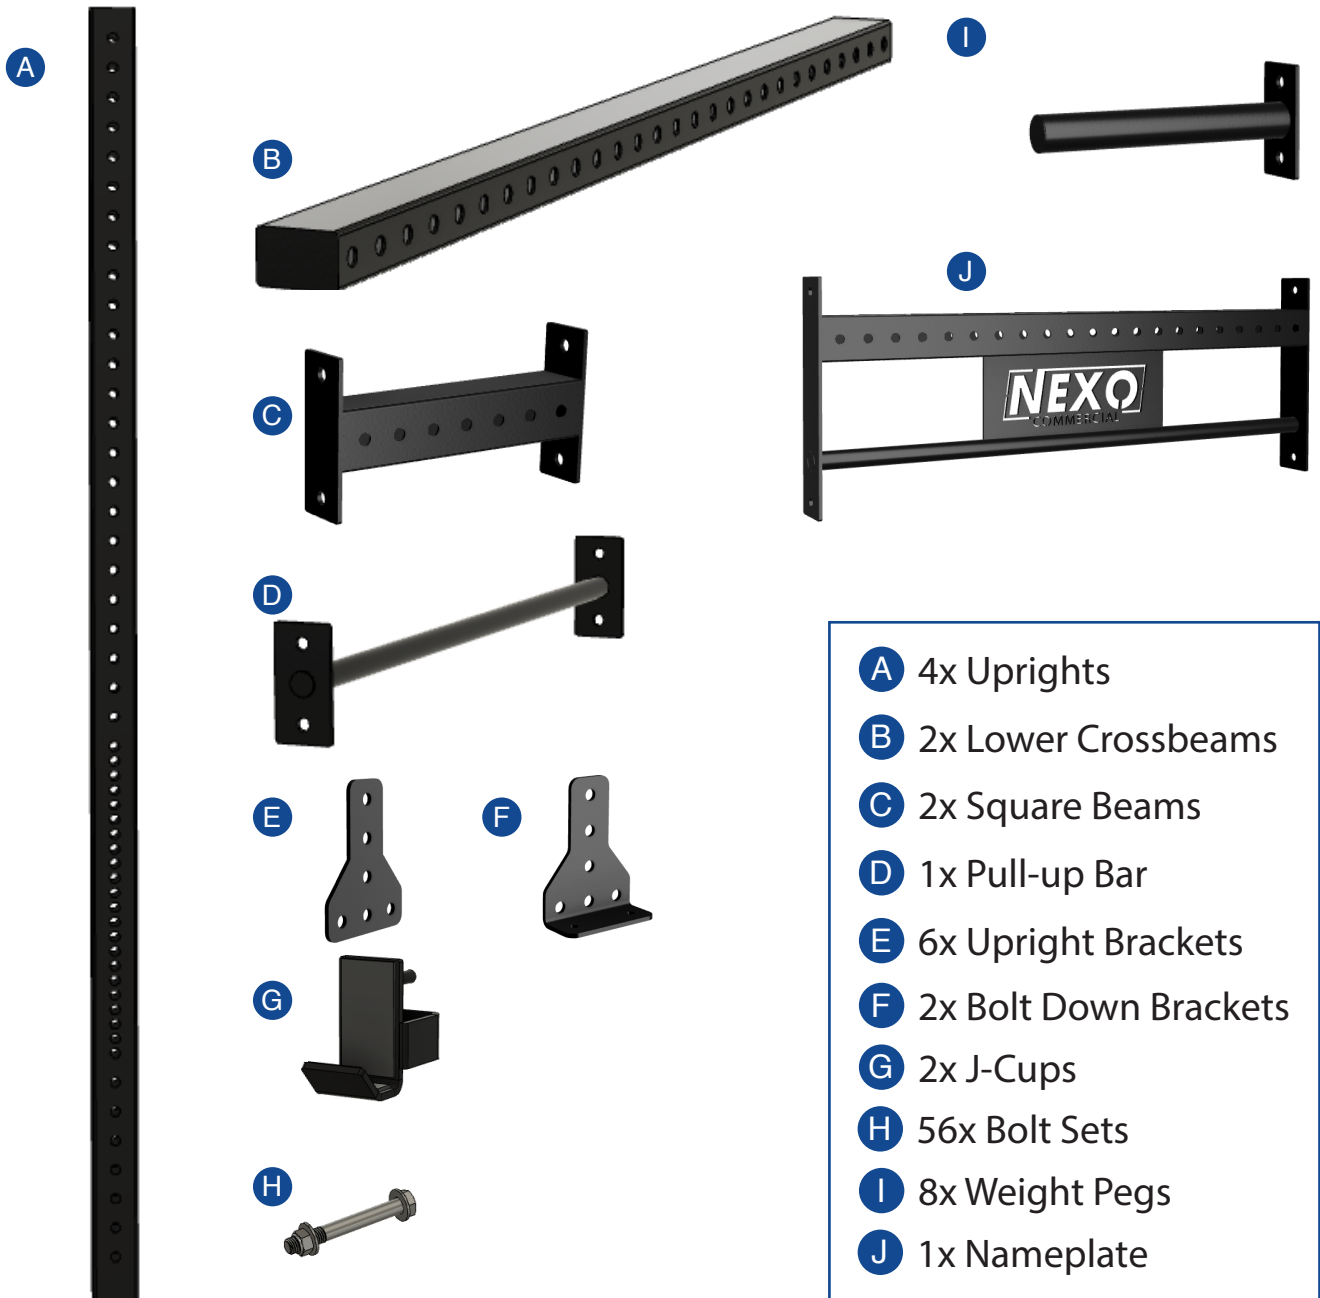


NEXO FITNESS

STEP 1

Assemble each side of the rack on the ground—the only difference between each side is the position of the Bolt Down Brackets.


Using 2x Uprights, 1x Lower Crossbeam, 1x Square beam, 3x Upright Brackets, 1x Bolt Down Bracket, and 16x Bolt Sets for each side.

Start the rear bracket on the 3rd hole from the back of the crossbeam and the front bracket 7 holes after the rear bracket.

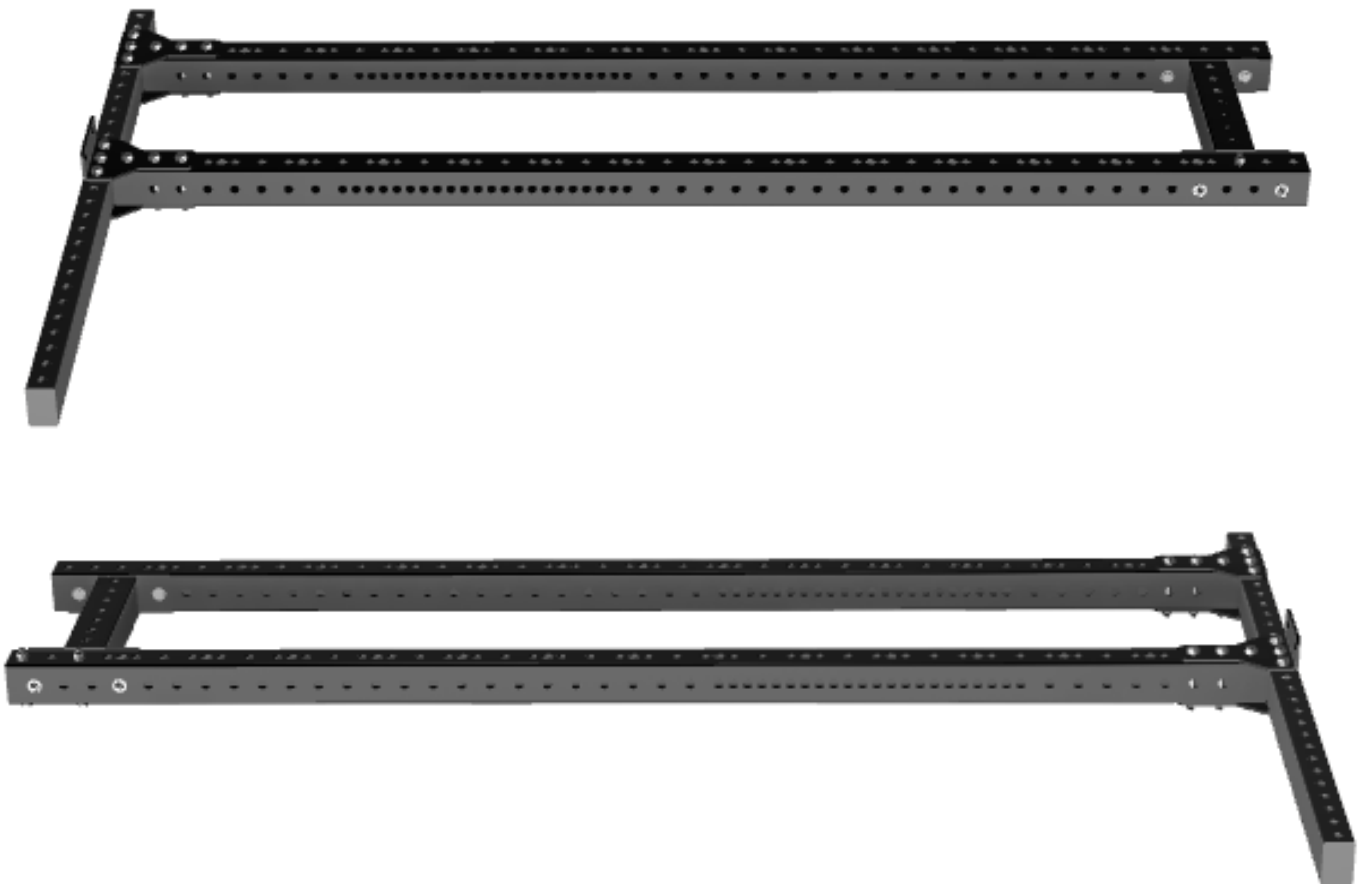

STEP 2


With a partner, stand each side up and connect the Pull-up bar at your desired height using 4x bolt sets.

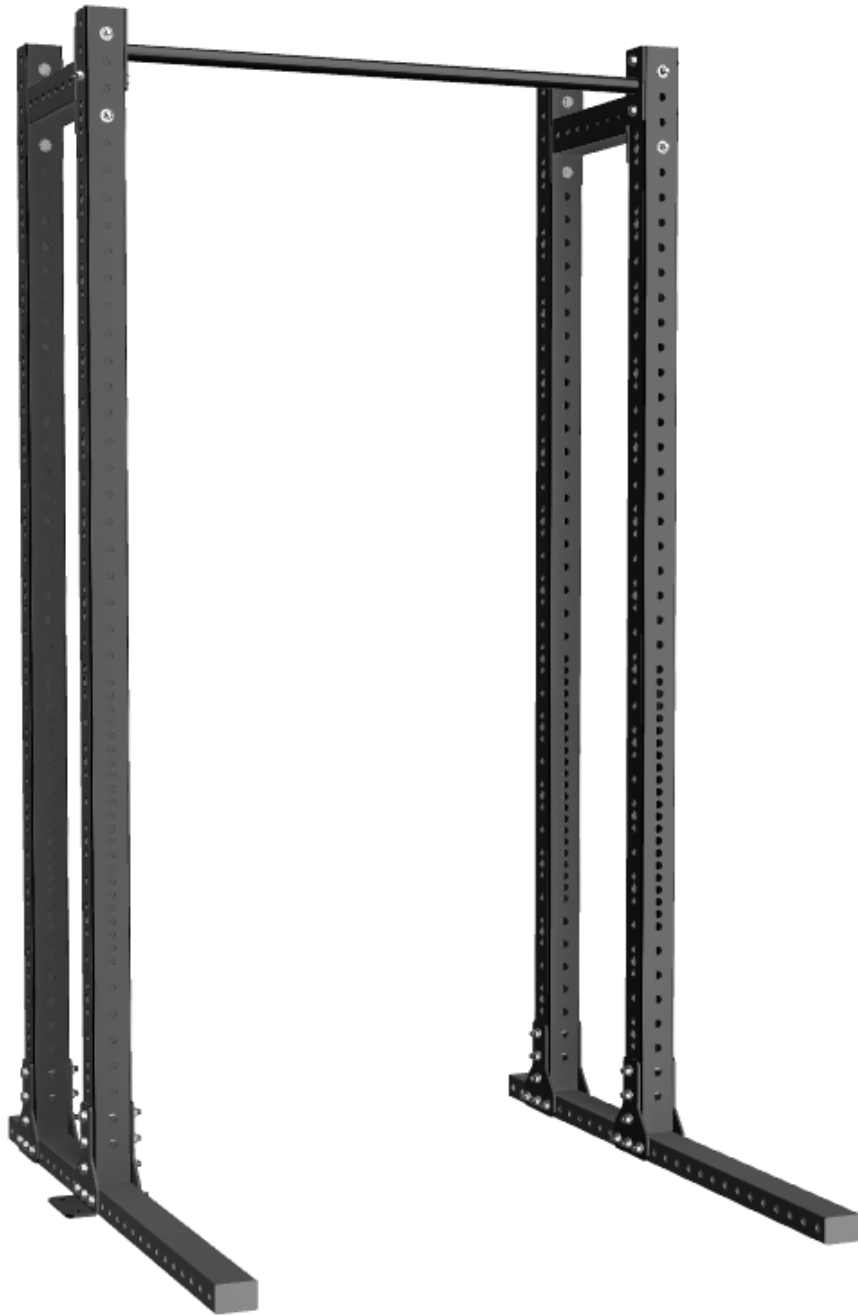

NEXO FITNESS

STEP 3

Now assemble the nameplate beam to the rear upright using 4x Bolt Sets.

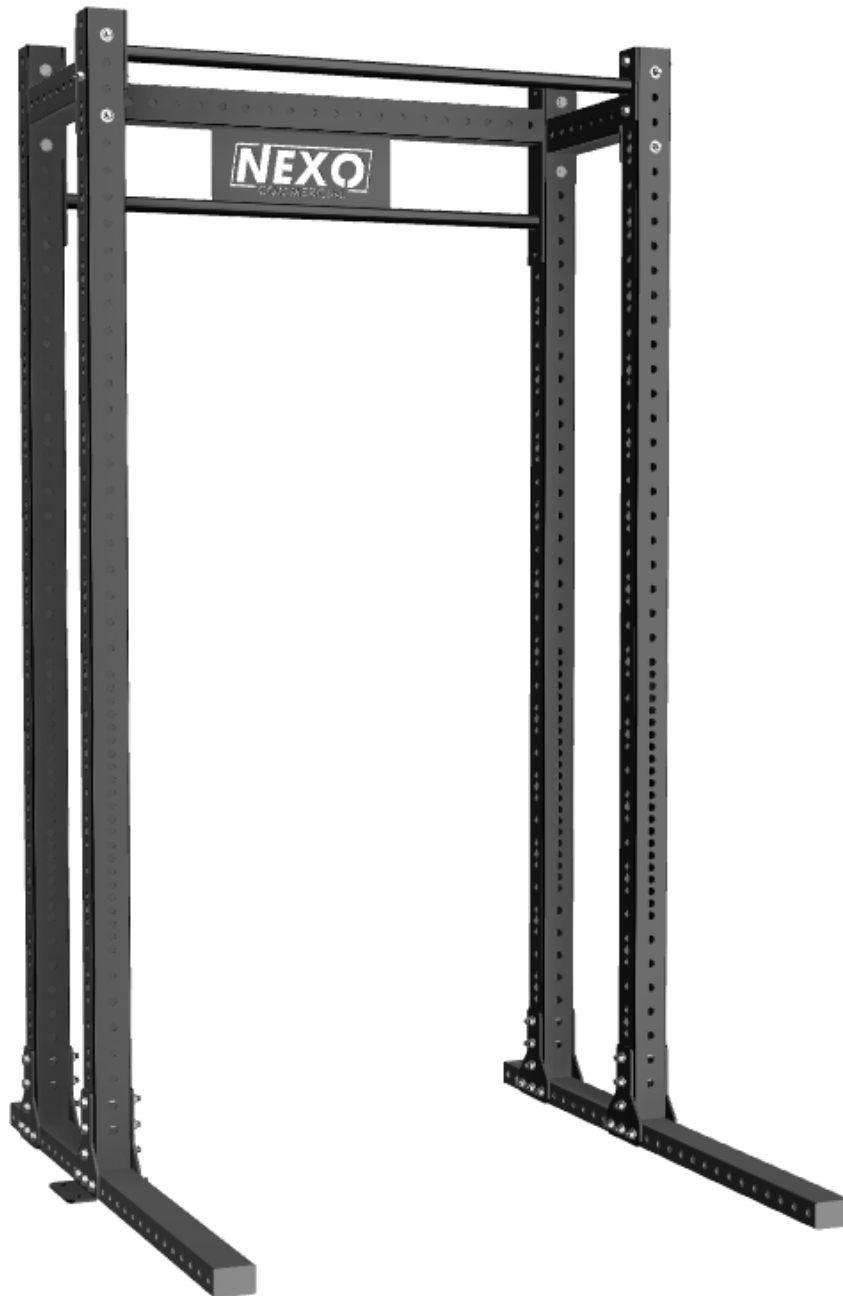

NEXO FITNESS

STEP 4

Assemble the 8x Weight Pegs at your desired locations and then tighten up all bolts.

Congrats! Your rack is ready to use, be sure to check your bolts before every workout



If you have any questions at all please don't hesitate to call us at 904.747.0789 or email sales@strengthdepot.com

NEXO FITNESS